

Number of contacts

Type F	48, 32
Type FM	45
Type 2F	max. 24
Type F9	max. 9

Contact spacing (mm)

5.08

Working current

6 A max.

see current carrying capacity chart

Clearance

≥ 1.6 mm

Creepage

≥ 3.0 mm

Working voltage

The working voltage also depends on the clearance and creepage dimensions on the pcb itself and the associated wiring

according to the safety regulations of the equipment
Explanations see chapter 00

Test voltage $U_{r.m.s.}$

1.55 kV (contact-contact)
2.5 kV (contact-ground)

Contact resistance

≤ 15 mΩ

Insulation resistance

≥ 10¹² Ω for standard articles
≥ 10¹¹ Ω for special NFF articles
(with part-no. ending 222)

Temperature range

– 55 °C ... + 125 °C

The higher temperature limit includes the local ambient and heating effects of the contacts under load
During reflow soldering

– 40 °C ... + 105 °C
for press-in connector

max. + 240 °C for 15 s
for SMC connectors

Electrical termination

Solder pins for pcb connections Ø 1 ± 0.1 mm according to IEC 60 326-3
Wrap posts 1 x 1 mm diagonal 1.34-1.45 mm
Crimp terminal 0.09-1.5 mm²
Angled solder pins 1 x 1 mm for pcb connections Ø 1.6 ± 0.1 mm
Solder lugs
Compliant press-in terminations
pcb thickness
Recommended pcb holes for press-in technology
See recommendation page 00.25 in acc. to EN 60 352-5

Insertion and withdrawal force

48 way ≤ 75 N
45 way ≤ 70 N
32 way ≤ 50 N
24 way ≤ 37 N

Materials

Mouldings

Thermoplastic resin, glass-fibre filled, UL 94-V0
Copper alloy

Contacts

Contact surface

Contact zone


Selectively plated according to performance level¹⁾

¹⁾ Explanation of performance levels see chapter 00

Current carrying capacity

The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals. The current capacity curve is valid for continuous, non interrupted current loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature.

Control and test procedures according to DIN IEC 60 512

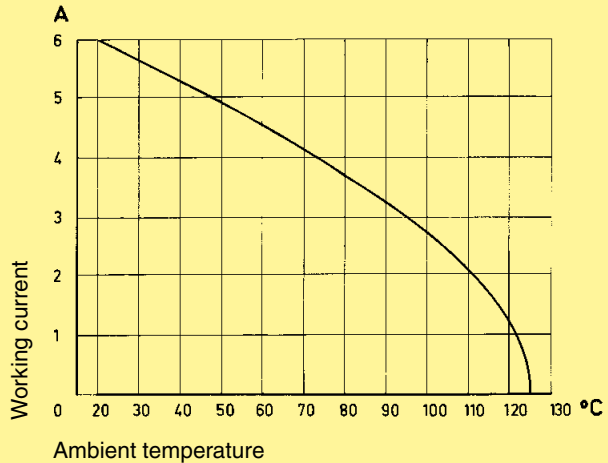


Fitting the crimp contacts

After crimping the wires onto the contacts with the help of a crimping tool or an automatic crimping machine the contacts should be correctly oriented and inserted into the cavities of the connector moulding in the required configuration. They snap into position and are firmly held in place. A light pull on the wire assures the correct tensile strength of the contact. When using stranded wires with a gauge below 0.37 mm² an insertion tool is necessary.

Removing the crimp contacts

The removal tool is inserted into a slot on the termination side of the respective crimp cavity. This action compresses the contact retaining spring therefore the contact can then be easily withdrawn using a light pull on the wire. This action will cause no damage to the contact/wire which can be repositioned/refitted as necessary. The drawing demonstrates the crimp removal procedure (max. 5x).

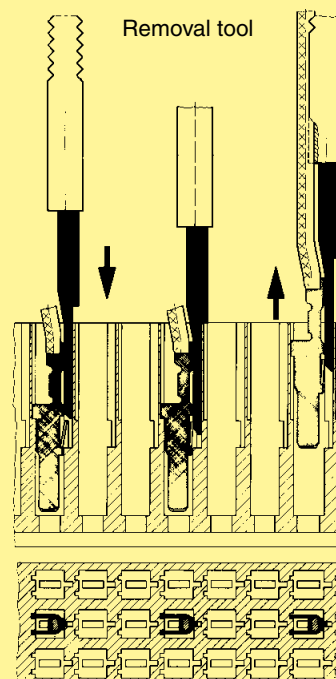

DIN Power up to 6 A