Number of contacts

96, 64

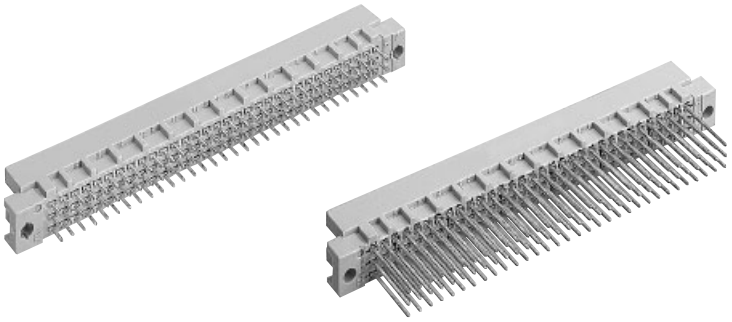

Male connectors

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to IEC 60603-2. Explanation chapter 00		
				3	2	1
Male connector with solder pins 2.5 mm	96		Performance level 3 on request		09 79 196 6902	Performance level 1 on request
Male connector with solder pins 4.0 mm	96				09 79 196 6903 09 79 396 6903[b]	
	64				09 79 164 6903 09 79 364 6903[b]	
Male connector with wrap posts[1] 13 mm	96				09 79 196 6907	
	64				09 79 164 6907	

Dimensions

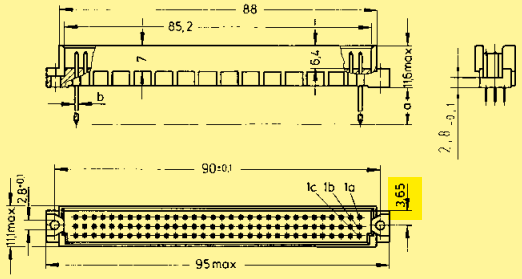

a	b	
2.5 4	ø 0.7	Solder pins

a	b	
13	□0.6	Wrap posts

Panel cut out

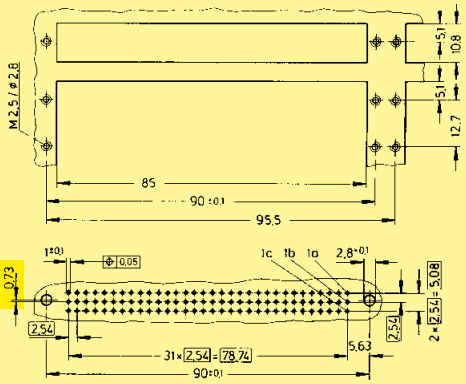

Board drillings

Mounting side

Contact arrangement
View from termination side

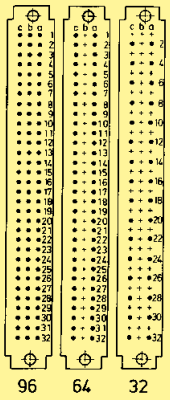

Dimensions in mm

Other contact arrangements on request

= deviating dimensions from standard male connectors (see page 01.46f)

[b] Connectors with snap-in clips see chapter 00

[1] To be used only for wire wrap termination