Number of contacts

21 + 5

F + M

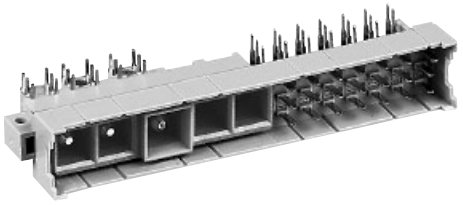

Male connectors

Identification	Number of contacts	Part No. 3	Performance levels according to IEC 60603-2. Explanation chapter 00 2	1
Male connector with angled solder pins (without special contacts)*	21 + 5	Performance level 3 on request	09 06 121 6981	Performance level 1 on request
High current contact for printed circuit terminations max. 40 A[2]			09 03 000 6127	
leading contact max. 40 A[2]			09 03 000 6128	
Removal tool			09 99 000 0328	

Dimensions

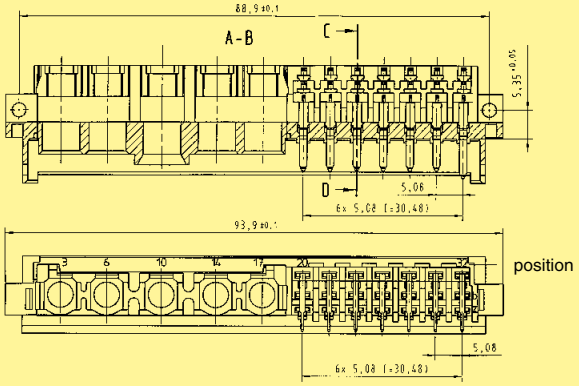

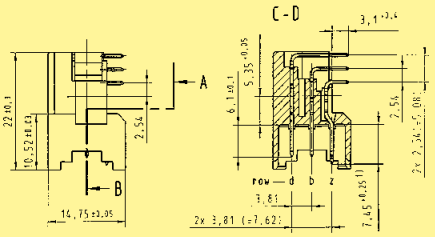

Board drillings

Mounting side

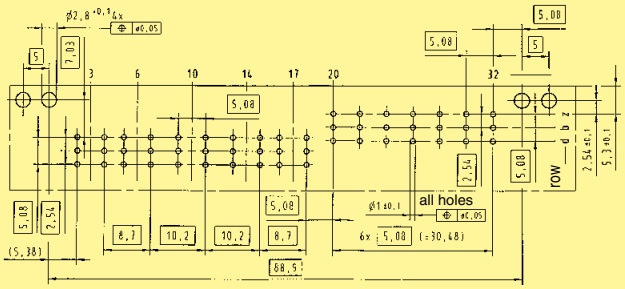

[1] Leading contact in position z 32

Dimensions

09 03 000 6127

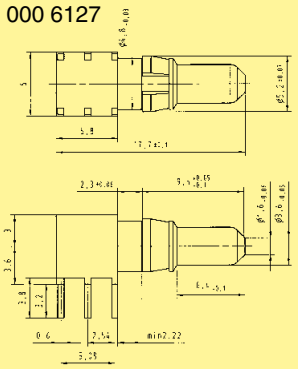

09 03 000 6128

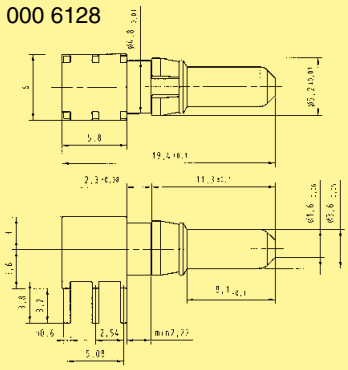



Dimensions in mm

DIN Power up to 15 A

* Pre-loaded with special contacts on request
Code keys see chapter 00

[2] Depending on the pcb design

Further special contacts see chapter 01