


Number of contacts

max. 48

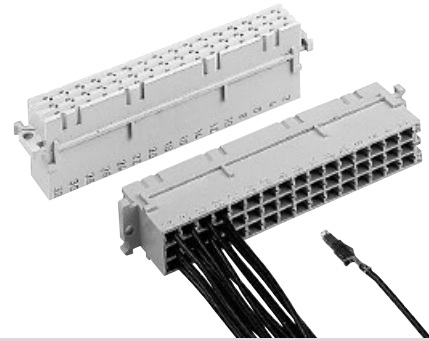

Female connectors

Identification	Number of contacts	Part No.	Drawing	Dimensions in mm
Female connector for crimp contacts ¹⁾ Order contacts separately	48	09 06 248 3201 09 06 248 3201 222 ^{f)}	<p>Contact arrangement View from termination side</p>	
Shell housing see chapter 20				

DIN Power up to 6 A

Identification	Identification Wire gauge	Part No.	Performance levels according to IEC 60603-2. Explanation chapter 00
			2
			1
Female crimp FC contacts			
Bandoliered contacts (approx. 2,500 pieces)	1	09 06 000 6484	09 06 000 6474
	2	09 06 000 6481	09 06 000 6471
	3	09 06 000 6482	09 06 000 6472
Bandoliered contacts (approx. 250 pieces)	1	09 06 000 7484	09 06 000 7474
	2	09 06 000 7481	09 06 000 7471
	3	09 06 000 7482	09 06 000 7472
Individual contacts ²⁾	1	09 06 000 8484	09 06 000 8474
	2	09 06 000 8481	09 06 000 8471
	3	09 06 000 8482	09 06 000 8472
Female contacts with solder lugs ³⁾ (lockable)			09 06 000 6420

Wire gauge mm ²	AWG	Insulation ø mm	Identification
FC 1	1	0.09 - 0.25 28 - 24	0.7 - 1.5
FC 2	2	0.14 - 0.56 26 - 20	0.8 - 2.0
FC 3	3	0.5 - 1.5 20 - 16	1.6 - 2.8

3.5 + 0.5 mm of insulation is stripped from the wires to be crimped

For the fabrication in line with the specification please use exclusively crimp tools approved by HARTING (see DIN EN 60352-2)

Insertion, removal and crimping tools see chapter 30

Bandoliered contacts

Individual contacts

¹⁾ With shroud coding, see also chapter 00
²⁾ Packaging unit 1,000 pieces
³⁾ Solder contacts must not be used together with shell housing A. Special contact surface: 2 µm gold.
^{f)} Railway classification NFF 16-101, Smoke index: F1, Flammability class: I2